



PCT/AU00/01022

REC'D 19 SEP 2000

WIPO

PCT

Patent Office  
Canberra

10/070246

ATU 00/01022

I, KAY WARD, ACTING MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PQ 2651 for a patent by PACIFIC ORE TECHNOLOGY LIMITED filed on 03 September 1999.

WITNESS my hand this  
Thirteenth day of September 2000

*K Ward*

KAY WARD  
ACTING MANAGER EXAMINATION  
SUPPORT AND SALES



**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

TITLE

"Improved Bacterial Oxidation of Sulphide Ores and Concentrates"

FIELD OF THE INVENTION

5 The present invention relates to the improved bacterial oxidation of sulphide ores and concentrates using a mixed bacterial culture.

More particularly, the process of the present invention is intended for use in the bacterial oxidation of ores and concentrates containing chalcopyrite.

BACKGROUND ART

10 Bacterial oxidation has been used for a number of years in successfully processing arsenopyrite, pyrite, pyrrhotite, covellite and chalcocite ores and concentrates, the one exception to this processing has been the oxidation of chalcopyrite ( $\text{CuFeS}_2$ ) ores and concentrates.

15 Prior art mixes of bacteria used to facilitate oxidation of sulphide ores and concentrates use a variety of suites of bacteria. For example, the mixed bacterial culture employed by Gencor Limited of South Africa comprise predominantly *Thiobacillus ferrooxidans*, *Thiobacillus thiooxidans* and *Leptospirillum ferrooxidans*. The Gencor cultures consist of a mixed population of mesophilic bacteria, which operate in the temperature range of  $35^\circ\text{C}$  to  $45^\circ\text{C}$ . (Dew & Miller, 1997).

20 Further, South African Patent Application 953488 to Gencor Limited discloses the use of *Thiobacillus ferrooxidans*, *Thiobacillus thiooxidans* and *Leptospirillum ferrooxidans* to achieve oxidation at a pH of preferably 3.

The bacterial culture utilised by BacTech (Australia) Pty Ltd, see for example US Patent 5429659, is a moderately thermophilic bacterial culture operating in the  
25 temperature range of  $46^\circ\text{C}$  to  $50^\circ\text{C}$ . The culture has been designated "M4" by

### DISCLOSURE OF THE INVENTION

In accordance with the present invention there is provided a process for the bacterial oxidation of sulphide ores and concentrates using a mixed bacterial culture at a temperature of about 40 to 65°C and a pH of about 0.8 to 2.2.

5 Preferably, the sulphide ore or concentrate contains chalcopyrite.

Still preferably, the bacterial oxidation may take place in the temperature range of 45 to 60°C.

In accordance with the present invention there is further provided a mixed bacterial culture for use in the bacterial oxidation of mineral ores and  
10 concentrates, the mixed bacterial culture able to oxidise the ores and concentrates at temperatures of about 45 to 65°C and a pH of about 0.8 to 2.2.

Preferably, the mineral ores and concentrates are a sulphide mineral ore or concentrate.

Still preferably, the mixed bacterial culture is able to oxidise chalcopyrite mineral  
15 ores and concentrates at grind or crush sizes of up to and greater than p80 90µm.

### DESCRIPTION

In order to raise a culture capable of processing chalcopyrite ores and concentrates a bacterial culture indigenous to a chalcopyrite mineral was sought.  
20 Indigenous bacterial cultures are typically superior to modified isolated cultures as the indigenous culture has already been adapted to the toxins and mineral components associated with a particular ore resulting in more effective and resilient bacterial strains.

Bacterial cultures indigenous to chalcopyrite ores were cultivated and tested for  
25 their ability to oxidise both their native ore/concentrate and other chalcopyrite

- this slurry a 300 mL slurry sample of the stock inoculum is introduced. The agitated reactor is aerated at a rate of 1L/min/L slurry. The adaption is continued until the level of relevant metals reporting to solution reaches either 100% or reaches a plateau. Solution samples are assayed for metal levels in solution
- 5 through the use of an ICP, where appropriate the pH of the slurry is adjusted with concentrated sulphuric acid so that the pH is between 1.6 and 1.8. In addition to metal levels reporting to solution the progress of the adaption/test is further monitored according to its oxidation reduction potential (ORP), ferrous concentrated and dissolved oxygen concentrated (DO).
  - 10 Once the culture has adapted to the material of interest it is used as an inoculum for further agitated aerated stirred tank reactor tests or as an inoculum for heap or column tests. The adapted bacterial inoculum is diluted further through the addition of an acidic basic nutrient solution containing ammonium sulphate, potassium orthophosphate and magnesium sulphate. The concentration of these
  - 15 nutrients in solution may vary between laboratory tests and commercial operation and between different commercial operations. In all cases the progress of oxidation is monitored through the levels of metals reporting to solution, pH, ORP, ferrous concentration and DO content.

The mixed bacterial culture of the present invention was tested on a range of

- 20 chalcopyrite bearing samples from various locations around the world. Table 1 below illustrates the mineralogy and origin of the chalcopyrite concentrates and ores tested using the bacterial culture of the present invention.

TABLE 1

25

| Sample | Mineralogy  | Origin |
|--------|---|--------|
| A      | Chalcopyrite copper concentrate   | USA    |
| B      | Molybdenum concentrate with low levels of copper in chalcopyrite.   | Canada |
| C      | Concentrate comprising predominantly chalcopyrite (35%) and cubanite (17%) with lesser quantities of pyrrhotite (10%) and minor amounts of pentlandite (3%) and sphalerite (3%) | Canada |
| D      | Copper Nickel concentrate in which copper is present as both  | USA    |

| Sample | Head Analysis          |       |       |                      | T °C | Days Leached | R sults after leaching % Cu Leached |
|--------|------------------------|-------|-------|----------------------|------|--------------|-------------------------------------|
|        | Particle Size Analysis | Fe %  | Cu%   | S <sup>total</sup> % |      |              |                                     |
| A      | P <sub>81</sub> <90µm  | 28.60 | 29.40 | 32.1                 | 48   | 36           | 96.6                                |
| B      | P <sub>85</sub> <90µm  | 2.85  | 1.95  | 37.6                 | 48   | 20           | 96.9                                |
| C      | P <sub>80</sub> <75µm  | 27.30 | 20.97 | 27.37                | 48   | 22           | 98.0                                |
| D      | P <sub>80</sub> <75µm  | 26.30 | 12.80 | 25.1                 | 48   | 27           | 95.0                                |
| E i    | P <sub>84</sub> <75µm  | 15.00 | 2.87  | 13.9                 | 48   | 28           | 99.3                                |
| E iii  | P <sub>78</sub> <75µm  | 26.6  | 4.62  | 34.4                 | 48   | 28           | 99.3                                |
| F      | P <sub>80</sub> <43µm  | 6.79  | 28.5  | 10.2                 | 60   | 14           | 95.3                                |
| G i    | P <sub>80</sub> <75µm  | 17.8  | 1.18  | 7.88                 | 48   | 14           | 98.8                                |
| G ii   | P <sub>80</sub> <75µm* | 45.1  | 6.82  | 34.8                 | 50   | 10           | 98.0                                |
| G iii  | P <sub>80</sub> <75µm  | 18.2  | 0.1   | 3.11                 | 50   | 8            | 97.3                                |
| H      | P <sub>80</sub> <75µm* | 23.8  | 19.7  | 36.7                 | 48   | 15           | 99.2                                |

\*nominal sizing of the "as received" concentrate.

A number of samples of the adapted bacterial culture have been grown at temperatures ranging from 35<sup>0</sup>C to 65<sup>0</sup>C, samples from each of the cultures have been removed and prepared for identification using 16SrRNA sequencing. Preparation of the samples prior to RNA sequencing has occurred via three different methods. The methods used and the results obtained from 16SrRNA sequencing are as follows.

### Methods

10 Six bioleaching samples (SN 45, P45, SS 45, RH 14K, and 014A) were tested.

The samples were mixed on a hand shaker at maximum speed for 30 minutes and processed as follows:

**A Shaken.** 500 ul of the shaken sample was immediately sedimented onto glass fiber filters (#30 Sliecher and Schuell, Keene, NH) in a 1.5 ml microtube by

partial sequences of the 16 rRNA gene of the bacterial species listed in the BLAST result column. A larger 16S segment would have to be sequenced for more precise identification.

A summary of the BLAST search results for the 300 base pair 16S rRNA gene segments sequenced is shown in Table 3. The numbers in parentheses refer to the % homology between the unknowns and their closest matches.

TABLE 3

| Band | sequenced from          | band with same mobility                               | BLAST result  |
|------|-------------------------|---|---|
| 1    | SM45-fast prep          | SN45-shaken,<br>C1 (1998)-shaken<br>C/C (1998)-shaken | <i>Sulfobacillus</i><br><i>thermosulfidooxidans</i> (98%)   |
| 2    | C1 (1998)-shaken        | SM45-fast prep<br>SN45-shaken<br>C/C (1998)-shaken    | <i>Sulfobacillus</i><br><i>thermosulfidooxidans</i> (98%)   |
| 3    | SN45-supernatant        | 014A-shaken   | <i>Streptococcus salvivaritus</i><br>(100%)<br><i>Streptococcus thermophilus</i><br>(100%)                |
| 4    | 014A (50°C)-<br>shaken  | SN45-supernatant                                      | <i>Streptococcus salvivaritus</i><br>(100%)<br><i>Streptococcus thermophilus</i><br>(100%)                |
| 5    | RH14K (60°C)-<br>shaken |   | <i>Caulobacter sp.</i> (99%)<br><i>Asticcacaulus exentricus</i> (99%)<br><i>Asticcacaulis biprothecum</i> |

It is envisaged that bacterial species can be omitted or substituted to the mixed culture outlined above in order to facilitate its operation at different temperatures. For example, *Thiobacillus thiooxidans* a sulphur oxidising bacteria may be substituted for *Thiobacillus caldus* at lower temperatures.

- 5 It is envisaged that the materials the mixed bacterial culture of the present invention may be used to treat include base metal ores and concentrates (copper, nickel, cobalt zinc etc), precious metal ores and concentrates (gold and silver) and platinum group metal (PGM) ores and concentrates. It is further envisaged that the culture may be used in a heap leach, tank leach, vat leach or  
10 dump leach oxidation.

Heap leaching is by far the most commonly utilised bacterial process for recovering copper from the more easily oxidised secondary copper minerals such as covellite and chalcocite. The process involves stacking crushed ore onto a specially prepared impermeable pad. The pad is designed so that the  
15 pregnant liquor draining from the heap collects at a point from which it is drained to a collection pond. Metals are recovered from the pregnant liquor solution either via precipitation, solvent extraction and/or electrowinning.

In order to successful heap leaching to take place it is essential to maintain the integrity of the heap. The main factor determining the heaps stability is the crush  
20 size of the ore. Crushing of the ore must take place to an extent where the ore is fine enough to allow good lixiviant percolation through the heap without excessive channelling taking place whilst also maintaining void spaces essential for good air dispersion and lixiviant drainage. If the ore is crushed too finely percolation through the heap may be very slow. Insufficient void spaces will be  
25 present and inefficient drainage of the heap will occur resulting in pooling in the heap and a high phreatic head. If on the other hand the ore size is too coarse drainage of the heap will be fast and the level of metals in solution will be low, in addition the structure of the heap may fail as the ore is broken down through biological and chemical processes. In many cases the crushed ore is  
30 agglomerated with binders, sulphuric acid and water prior to stacking, the result being a more uniform particle size and acid distribution throughout the heap.

better in a vat, though there is still a limit to the fineness imposed by the need for permeability by both the air and solution. Beyond this limit, it becomes necessary to suspend the material in the solution. If the vats are to be single use only, they can be constructed as lined dams, sloped to one corner to allow  
5 circulation and recovery of the leach liquor. Multiple use vats would need to be of a more robust constructions such as concrete or brick. Aeration would be by submerged pipe or could otherwise be accomplished by intermittently draining the vat and allowing air to be drawn into the ore by the retreating liquor.

10 Tank leaching, as the name suggests, entails the bacterial leaching of aerated mineral slurries in agitated tanks. The technology was pioneered by Gencor and is now well developed for the treatment of gold. The technology would be very similar for base metal bio-leaching, but to date a system for copper has not been commercially developed. There is currently some activity in this area though, as both BacTech of Australia and Billiton South Africa have both run base metal bio-  
15 leach pilot plants. Billiton is developing its' BioNic and BioCop processes, though very little literature has been released on BioCop at present. BacTech in conjunction with Mintek of South Africa on the otherhand have published data on their pilot plant at the Mt Lyell Copper mine in Tasmania Australia. This pilot plant used stirred tank bacterial oxidation technology to leach copper from  
20 chalcopyrite rich operating at between 45°C – 50°C and using thermophilic bacteria operating at 70°C (Van Staden, 1998). The trial at the pilot plant involved regrinding the concentrate to produce an ultra-fine ground feed, bacterial leaching of the concentrate followed by solid/liquid separation, iron precipitation, solvent extraction of copper from solution and electrowinning of  
25 copper to produce copper cathode (Rhodes et al., 1998).

A copper extraction of 96.4% reporting to solution was obtained from the fully integrated circuit in which the raffinate from solvent extraction was recycled to the bacterial oxidation circuit. This recovery was obtained using moderately thermophilic bacteria to facilitate the reaction. A minimal amount of the copper  
30 reporting to solution was lost to the precipitate during iron precipitation (Rhodes et al., 1998). This bacterial oxidation process has been shown to be successful



Relman, D.A. 1993. Universal bacterial 16s rRNA amplification and sequencing, p489-495. *In* D.H. Persing, T.F. Smith, F.C. Tenover, and J. White (eds) Diagnostic Molecular Biology Principles and Applications – 1993. American Society for Microbiology, Washington, DC.

- 5 Sheffield, V.C., D.R. Cox, L.S. Lerman, and R.M. Muiers. 1989. Attachment of a 40 base pair G+C rich sequence (GC-clamp) to genomic RNA fragments by polymerase chain reaction results in improved detection of single base changes. *Proc.Natl.Acad.Sci USA* 86:232-236


Dated this 3rd day of September 1999:

**PACIFIC ORE TECHNOLOGY LIMITED**  
Applicant

Wray & Associates  
Perth, Western Australia  
Patent Attorneys for the Applicant(s)

FIGURE 1.

BEST AVAILABLE COPY

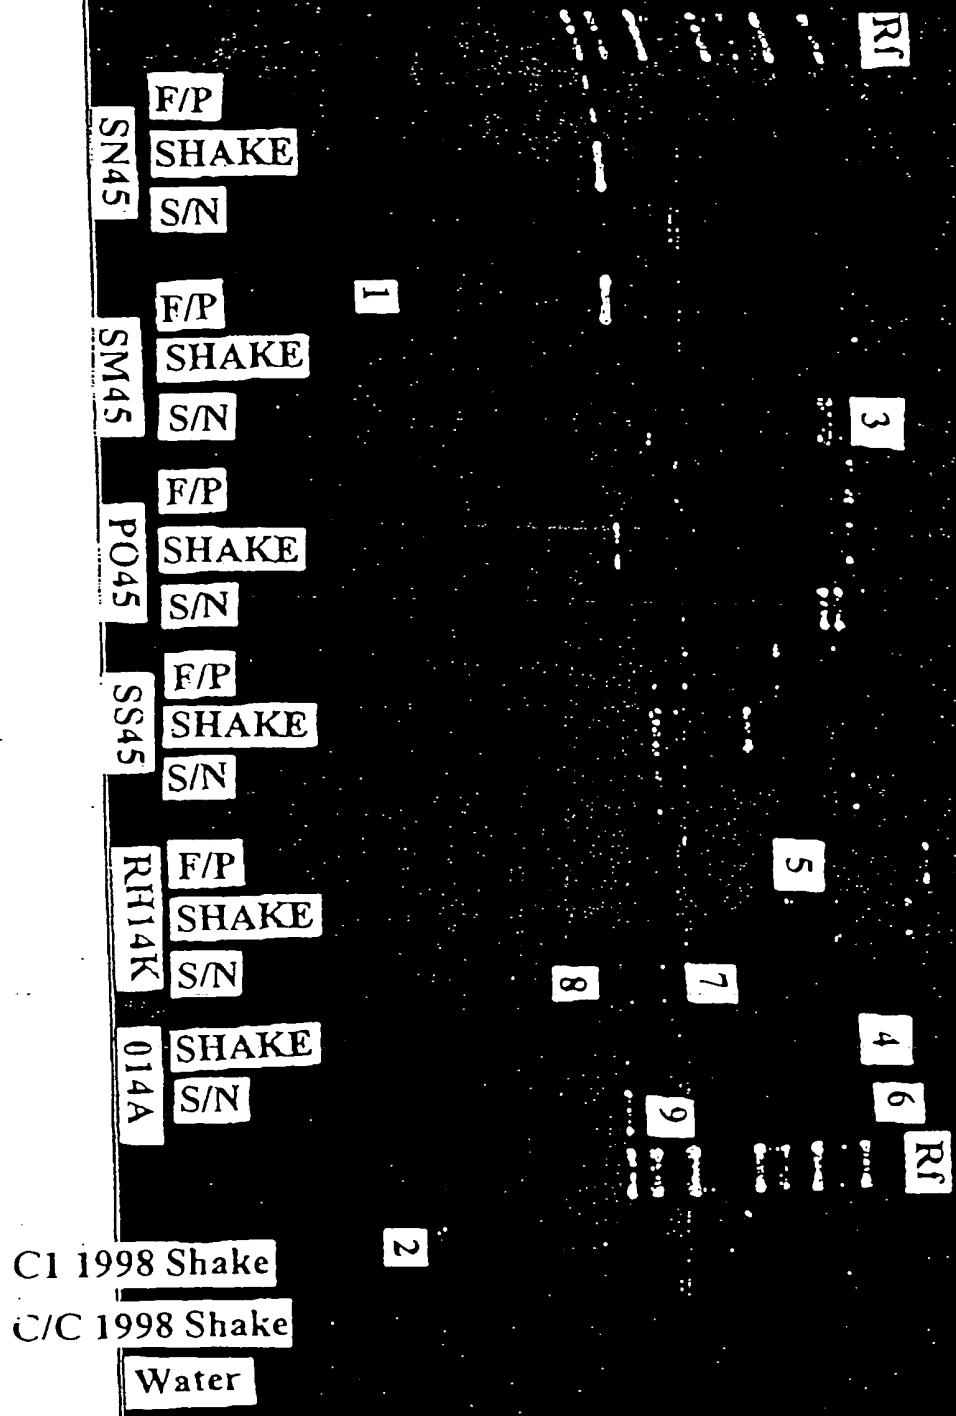

however the costs associated with ultra-fine milling of the concentrate may make the capital and operating costs too high.

Modifications and variations such as would be apparent to the skilled addressee are considered to fall within the scope of the present invention.

5

## REFERENCES

Altschul, S.F., W. Gish, W. Miller, E.W. Myers, and D.J. Lipman. 1990. Basic local alignment search tool. *J. Mol. Bio.* 215: 403-410.

Brierley C.L. and R Brans, 1994 – Selection of BacTech's Thermophilic Bio-Oxidation Process for Youanmi Mine, In *Biomine 94, Conference Proceeding*  
10 *Perth Western Australia. Section 5.*

Barrett, J., Hughes, M.N., Ewart, D.K. and Poole, R.K., 1988 – The isolation and characterisation of a moderately thermophilic mixed culture of autotrophic bacteria: application of the oxidation of refractory gold concentrates. *Perth Gold 88*, Randol International Ltd, Golden, Colorado, pp 148 150.

15 Dew, D.M. and D.M. Miler, 1997 – The BioNIC Process; Bioleaching of Mineral Sulphide Concentrates For Recovery of Nickel, In *IBS Biomine '97, Conference Proceedings, Sydney*, p M7.1.0 – M7.1.9.

Muyzer, G.E. C. DeWall, and A.G. Uitterlinden, 1993. Profiling of complex microbial populations by denaturing gradient gel electrophoresis analysis of  
20 polymerase chain reaction amplified genes coding for the 16s rRNA. *Appl. Environ. Microbiol.* 59: 695-700.

Nobar, A.M., Ewart, D.K., Alsaffar, L., Barrett, J., Hughes M.N. and Poole, R.K., 1988 – Isolation and characterisation of a mixed microbial community from an Australian mine: application to the leaching of gold from refractory ores,  
25 *Biohydrometallurgy* (P.R. Norris and D.P. Kelly, eds), Science and Technology Letters, Kew Surrey, UK, pp 530-531.

Prior to stacking the heap a drainage layer is usually placed on the pad, this is generally composed of unreactive rock such as quartzite and ensures adequate drainage of the pregnant liquor. Heaps are irrigated with acidified bacterial liquor which acts as the lixiviant for leaching of the copper from the ore. The bacteria  
5 employed in heap by leaching are generally aerobic and therefore require oxygen this may be forced into the heap means of low pressure blowers or air may be sucked into the heap due to a chimney effect that occurs as bacteria oxidise ore and create heat.

A variation on heap leaching involves the Geocoat process which had been  
10 marketed by US company Geobiotics. The process involves producing a concentrate from the sulphidic ore, coating this onto crushed, sized rock and producing a heap that can be subjected to bacterial oxidation.

Dump leaching is very similar to heap leaching and is generally reserved for lower grade ores. Often dump leaching will be considered as accompanying  
15 process to heap leaching rather than a stand alone project in its own right. Essentially, where waste or low grade rock is to be mined and stockpiled anyway, with a little ground preparation beforehand, some value can be extracted from the material. Indigenous bacteria will be present in the heap and all that is required is to promote their activity. This is done by the addition of acid  
20 and nutrients to the irrigation solution, such as with heap leaching. The difference is in the cost.

Little or no crushing will be performed prior to stacking. Only the bare minimum of pad preparation will be performed. There will be no forced aeration.

Vat leaching can be considered to be intermediate between heap leaching and  
25 tank leaching in terms of cost, sophistication and efficiency. It is a process in which the material to be treated is fully immersed in the leach solution but is not agitated, at least not to any significant extent, though some agitation due to the air and/or solution flow may take place. The process has the advantage over heap or dump leaching in that complete wetting of the mineral surfaces is  
30 achieved and channelling is avoided. Finer crush sizes can also be handled

---

|   |                              |  |  |
|---|------------------------------|--|--|
|   |                              |  | (99%)<br><i>Psuedomonas echinoides</i> (97%)<br><i>Sphingomonas paucimobilis</i> (98%)   |
| 6 | 014A (50°C)-<br>shaken       |  | <i>Psuedomonas echinoides</i> (98%)<br><i>Sphingomonas trueperi</i> (97%)<br><i>Caulobacter sp.</i> (97%)<br><i>Asticcacaulis biprothecum</i> (979%) |
| 7 | RH14K (60°C)-<br>supernatant | SN45-<br>fastprep/shaken<br><br>SM4-<br>shaken/supernat.<br><br>PO45-<br>fastprep/shaken<br><br>SS45-<br>fastprep/shaken/<br>supernatant<br><br>RH14K-shaken | <i>Enterobacter sp</i> (80%)   |
| 8 | RH14K (60°C)-<br>supernatant | PO45-<br>fastprep/shaken/<br>supernatant<br><br>SS45-supernatant   | <i>Unidentified bacterium</i> (97%)<br><i>Beta proteobacterium</i> (98%)<br><i>Denitrifying FE&lt;II&gt; oxidizing bacteria</i> (97%)                |
| 9 | 014A (500C)-<br>supernatant  | SN45-<br>fastprep/shaken/<br>supernatant<br><br>SM45-fastprep<br><br>014A shaken   | <i>Thermobacillus ferrooxidans</i> (96%)   |

centrifugation at 14Krpm for 4 minutes. The supernatant was carefully removed, and the sedimented material was washed twice in 1 mL of tissue culture grade water.

**B. Fast Prep.** 500 ul was immediately removed and homogenized using a  
5 Savant BIO 101 Fast Prep machine (BioCan Scientific) at speed 4 for 20 seconds. The homogenates were sedimented and washed as described above.

**C. Supernatant.** Following shaking, the samples were allowed to sit for 5 minutes to allow the particulate matter to settle to the bottom of the tubes. 500 ul of the supernatant was then sedimented and washed as previously described.

10 RNA was extracted from all samples using InstaGene Matrix (BioRad, Hercules, CA) as per manufacture's instructions. The RNA concentration was determined by uv spectrophotometry ( $A_{260}$ ) and 50 ng were added to the PCR reaction mixture with a final concentration of 2mM magnesium ion, 100uM dNTP, 0.32  
15 Um EACH PRIMER AND 0.625 UNITS OF Taq Gold Polymerase. The universal primers of p515f and p806r (Relman 1993) were used to amplify an approximately 300bp segment of the 16S ribosomal RNA gene. The forward primer was modified with a 40bP GC rich sequence that terminated the migration of the amplified product at various concentrations of urea/formamide within a denaturing gradient gel (Sheffield et al. 1989; Muyzer et al. 1993) Bands of  
20 interest were cut from the denaturing gels and purified amplified product was subjected to cycle sequencing using Big Dye Terminator extension from the reverse primer using the conditions recommended (PE Applied Biosystems). Sequence determination was performed on a 310 Genetic Analyser (PE Applied Biosystems). Sequence comparisons were conducted using the basic local  
25 alignment search tool (BLAST; Altschul et al. 1990).

### Results

Each of the three samples processing methods resulting in a different profile for the same sample, as shown in Figure 1. Nine predominant bands were selected for sequencing. The 300bp segments sequenced had the closest match with

---

|   |   |                   |
|---|---|-------------------|
|   | chalcopyrite (18.5 – 28.5%) and cubanite (15.8 – 30.8%). Nickel is present as pentlandite (17.7 – 10.4%) and occasionally replaced as violarite.          |                   |
| E | Three copper concentrates consisting of chalcopyrite, pyrite and minor amounts of bornite.  | Canada            |
| F | Copper concentrate consisting of chalcocite (14%), chalcopyrite (10%), bornite (1%) and pyrite (1%).  | South Africa      |
| G | Samples i and iii are ore samples and sample ii is a concentrate sample. The sulphide minerals are predominantly pentlandite, chalcopyrite and pyrrhotite | Western Australia |

### General test procedure

All tests on mineral samples were conducted in agitated aerated tank reactors. Each test had a solids density of 10%w/v and was aerated by sparging at a rate of 1L air per minute per litre of slurry in the reactor. The evaporative losses due to the heating and aeration of the slurry were made up prior to sampling the tests. This was accomplished through the addition of tap water. All slurries were made up in a proprietary nutrient media with a starting pH of 1.0. Sampling involved assaying the solution for iron, copper and other relevant metal ions. In addition, the oxidation-reduction potential (ORP), pH, ferrous iron and dissolved oxygen levels were also monitored and recorded. Copper release was used to monitor the progress of the test and once this reached a stable plateau or attained approximately 100% of the copper reporting to solution the test was deemed complete. Once complete the pulps were pressure filtered, the final leach liquor assayed and the filter cake washed with acidified water and dried. The dried filter cake was weighed and the residue assayed in order to conduct a metallurgical balance.

The results from head analysis, particle size analysis and the results following oxidation are summarised and are displayed in table 2.

TABLE 2

ores and concentrates. During this program of work a culture was raised from a chalcopyrite ( $\text{CuFeS}_2$ ) concentrate obtained from a base metal ore found in New Brunswick, Canada. Following the isolation of the bacterial culture, testing of the culture has taken place on both its' native ore and concentrate and on a variety of other ores and concentrates. Additions to the original culture have taken place as, during testing of the culture of different materials, any native bacteria capable of operating under the parameters of the test and being able to operate competitively with the introduced culture have not only survived but have thrived in the environment. In this way any bacteria native to the ore or concentrate being tested have been incorporated into the culture. In addition, the culture has been grown successfully at different temperatures ranging from  $40^\circ\text{C}$  to  $65^\circ\text{C}$  and at varying levels of acidity with pH levels ranging from 0.8-2.2. Successful testing of the culture has taken place in both aerated agitated stirred tank reactors and in aerated columns to facilitate column leaching. Successful testing of the culture took place at a variety of temperatures and on a variety of ores and concentrates.

The mixed bacterial culture of the present invention consists of a variety of iron and sulphur oxidising bacteria capable of working at temperatures of up to  $65^\circ\text{C}$  and at pH ranges of between 0.8 and 2.5. The mixed bacterial culture may include, but is not limited to, *Sulfobacillus thermosulfidoxidans*, *Thiobacillus caldus*, *Thermobacillus ferrooxidans* and a number of as yet unidentified bacterial species.

#### Example

Prior to testing any material the stock bacterial culture is first adapted to the material of interest. This is facilitated by placing 2700 mL of modified OK solution (1.0 g/L ammonium sulphate, 0.5 g/L di-potassium orthophosphate, 0.16 g/L magnesium sulphate heptohydrate, pH 1.6 – 1.8) into an agitated aerated stirred tank reactor heated to the required temperature. To the modified OK medium a 150g sample of milled ( $p_{80} < 45 \mu\text{m}$ ) test material is added and the pH adjusted down to between 1.6 and 1.8 if necessary using concentrated sulphuric acid. To



Barrett et al (1988) and has been described by Nobar et al. (1988) (Brierley and Brans 1994).

The MINBAC process developed by Mintek – Anglo American Corporation based in Randburg, South Africa utilises a mesophilic mixed bacterial culture  
5 comprising *Thiobacillus ferrooxidans*/*Leptospirillum ferrooxidans* (Brierley and Brans 1994).

The bacterial cultures presently used are unable to produce commercially acceptable results for chalcopyrite without either ultra fine milling ( $p_{80} < 20\mu\text{m}$ ) of the ore or concentrate to facilitate bacterial oxidation or the use of very long  
10 times to achieve oxidation. Times of over 100 days are not uncommon.

Current trends are moving towards the use of higher temperatures to encourage ferric oxidation. However, the high temperatures employed lead to having to cool post-oxidation and to provide reactors formed of specialised materials, for example surgical grade stainless steel. Both circumstances increase the cost of  
15 such an operation.

The process of the present has as one object thereof to overcome the abovementioned problems associated with the prior art, or to at least provide a useful alternative thereto.

Throughout this specification, unless the context requires otherwise, the word  
20 “comprise”, or variations such as “comprises” or “comprising”, will be understood to imply the inclusion of a stated integer or group of integers but not the exclusion of any other integer or group of integers.

Throughout the specification, an ore is considered material that has been removed from the ground and does not receive any treatment to increase the  
25 metal concentration. A concentrate is produced by passing an ore through a treatment process, generally gravity or flotation, in order to increase the concentration of desired metals and decrease the volume of material which is subsequently treated to recover those desired metals.

---

**ORIGINAL**  
**AUSTRALIA**

*Patents Act 1990*

**PROVISIONAL SPECIFICATION**

Invention Title: "Improved Bacterial Oxidation of Sulphide Ores and Concentrates"

The invention is described in the following statement: